
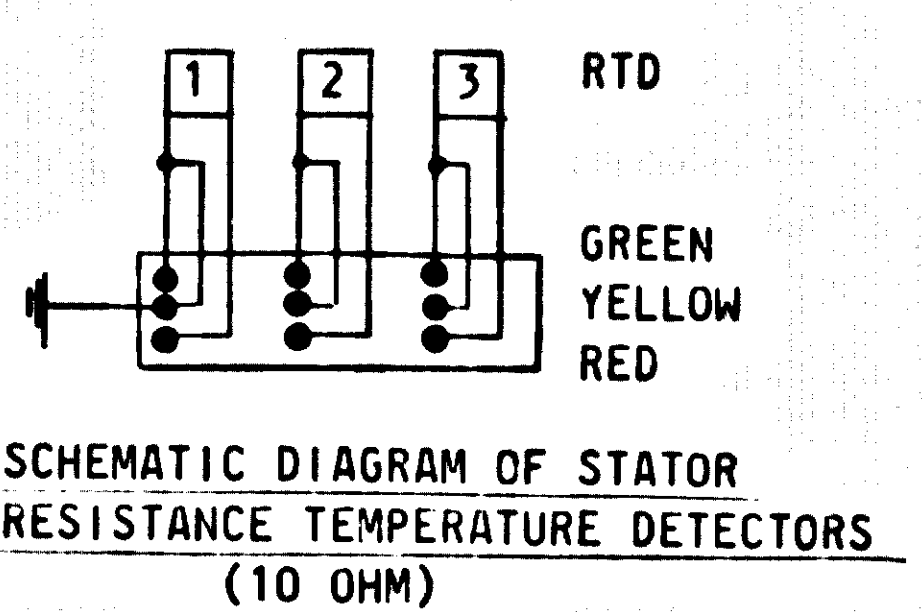


966211

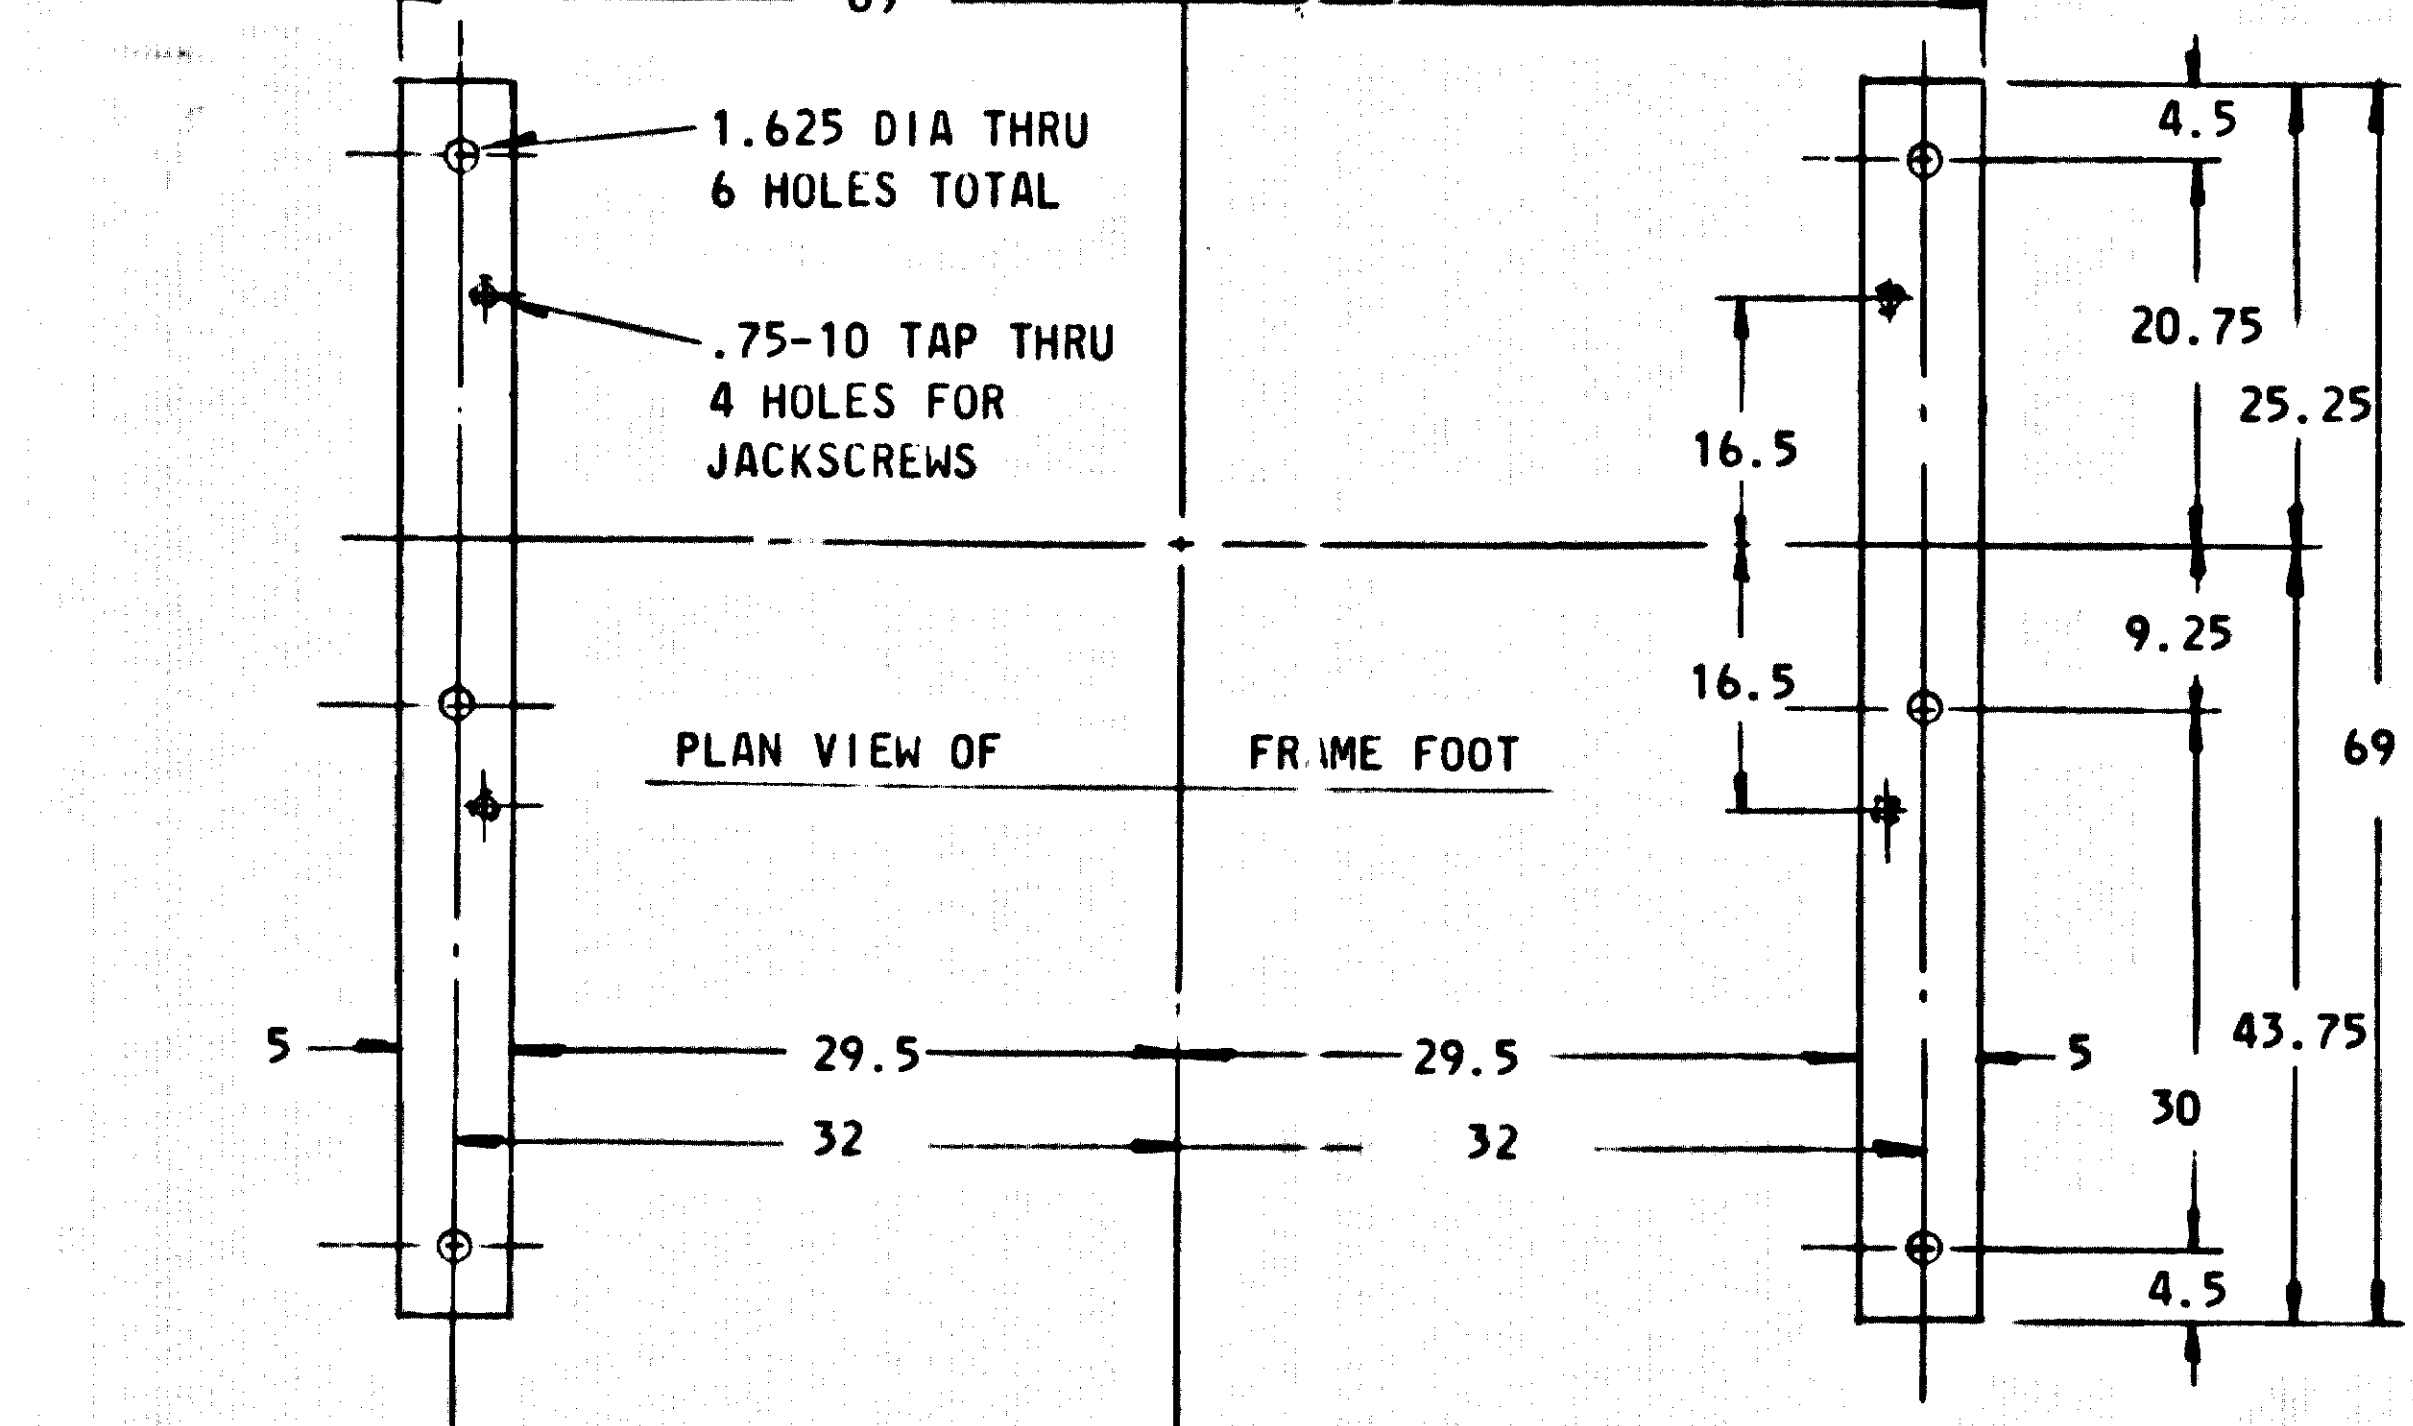

PARTS NOT SUPPLIED BY WESTINGHOUSE ELECTRIC CORPORATION: COUPLING AND FOUNDATION BOLTS.


APPROXIMATE WEIGHTS	
ROTOR	7,000 LBS.
STATOR	7,800 LBS.
TOTAL	15,000 LBS.

VOLTAGE SEQUENCE T₁-T₂-T₃ FOR CW ROTATION FACING END
VOLTAGE SEQUENCE T₃-T₂-T₁ FOR CCW ROTATION OPP. SHAFT EXT.

MOTOR TO BE SHIPPED ASSEMBLED.

USE WESTINGHOUSE P.D.S. 8750-2 GREASE FOR BEARING LUBRICATION.

PRIMARY VOLTAGE - 4160	SECONDARY VOLTAGE - 1185
PRIMARY AMPS - 199	SECONDARY AMPS - 600

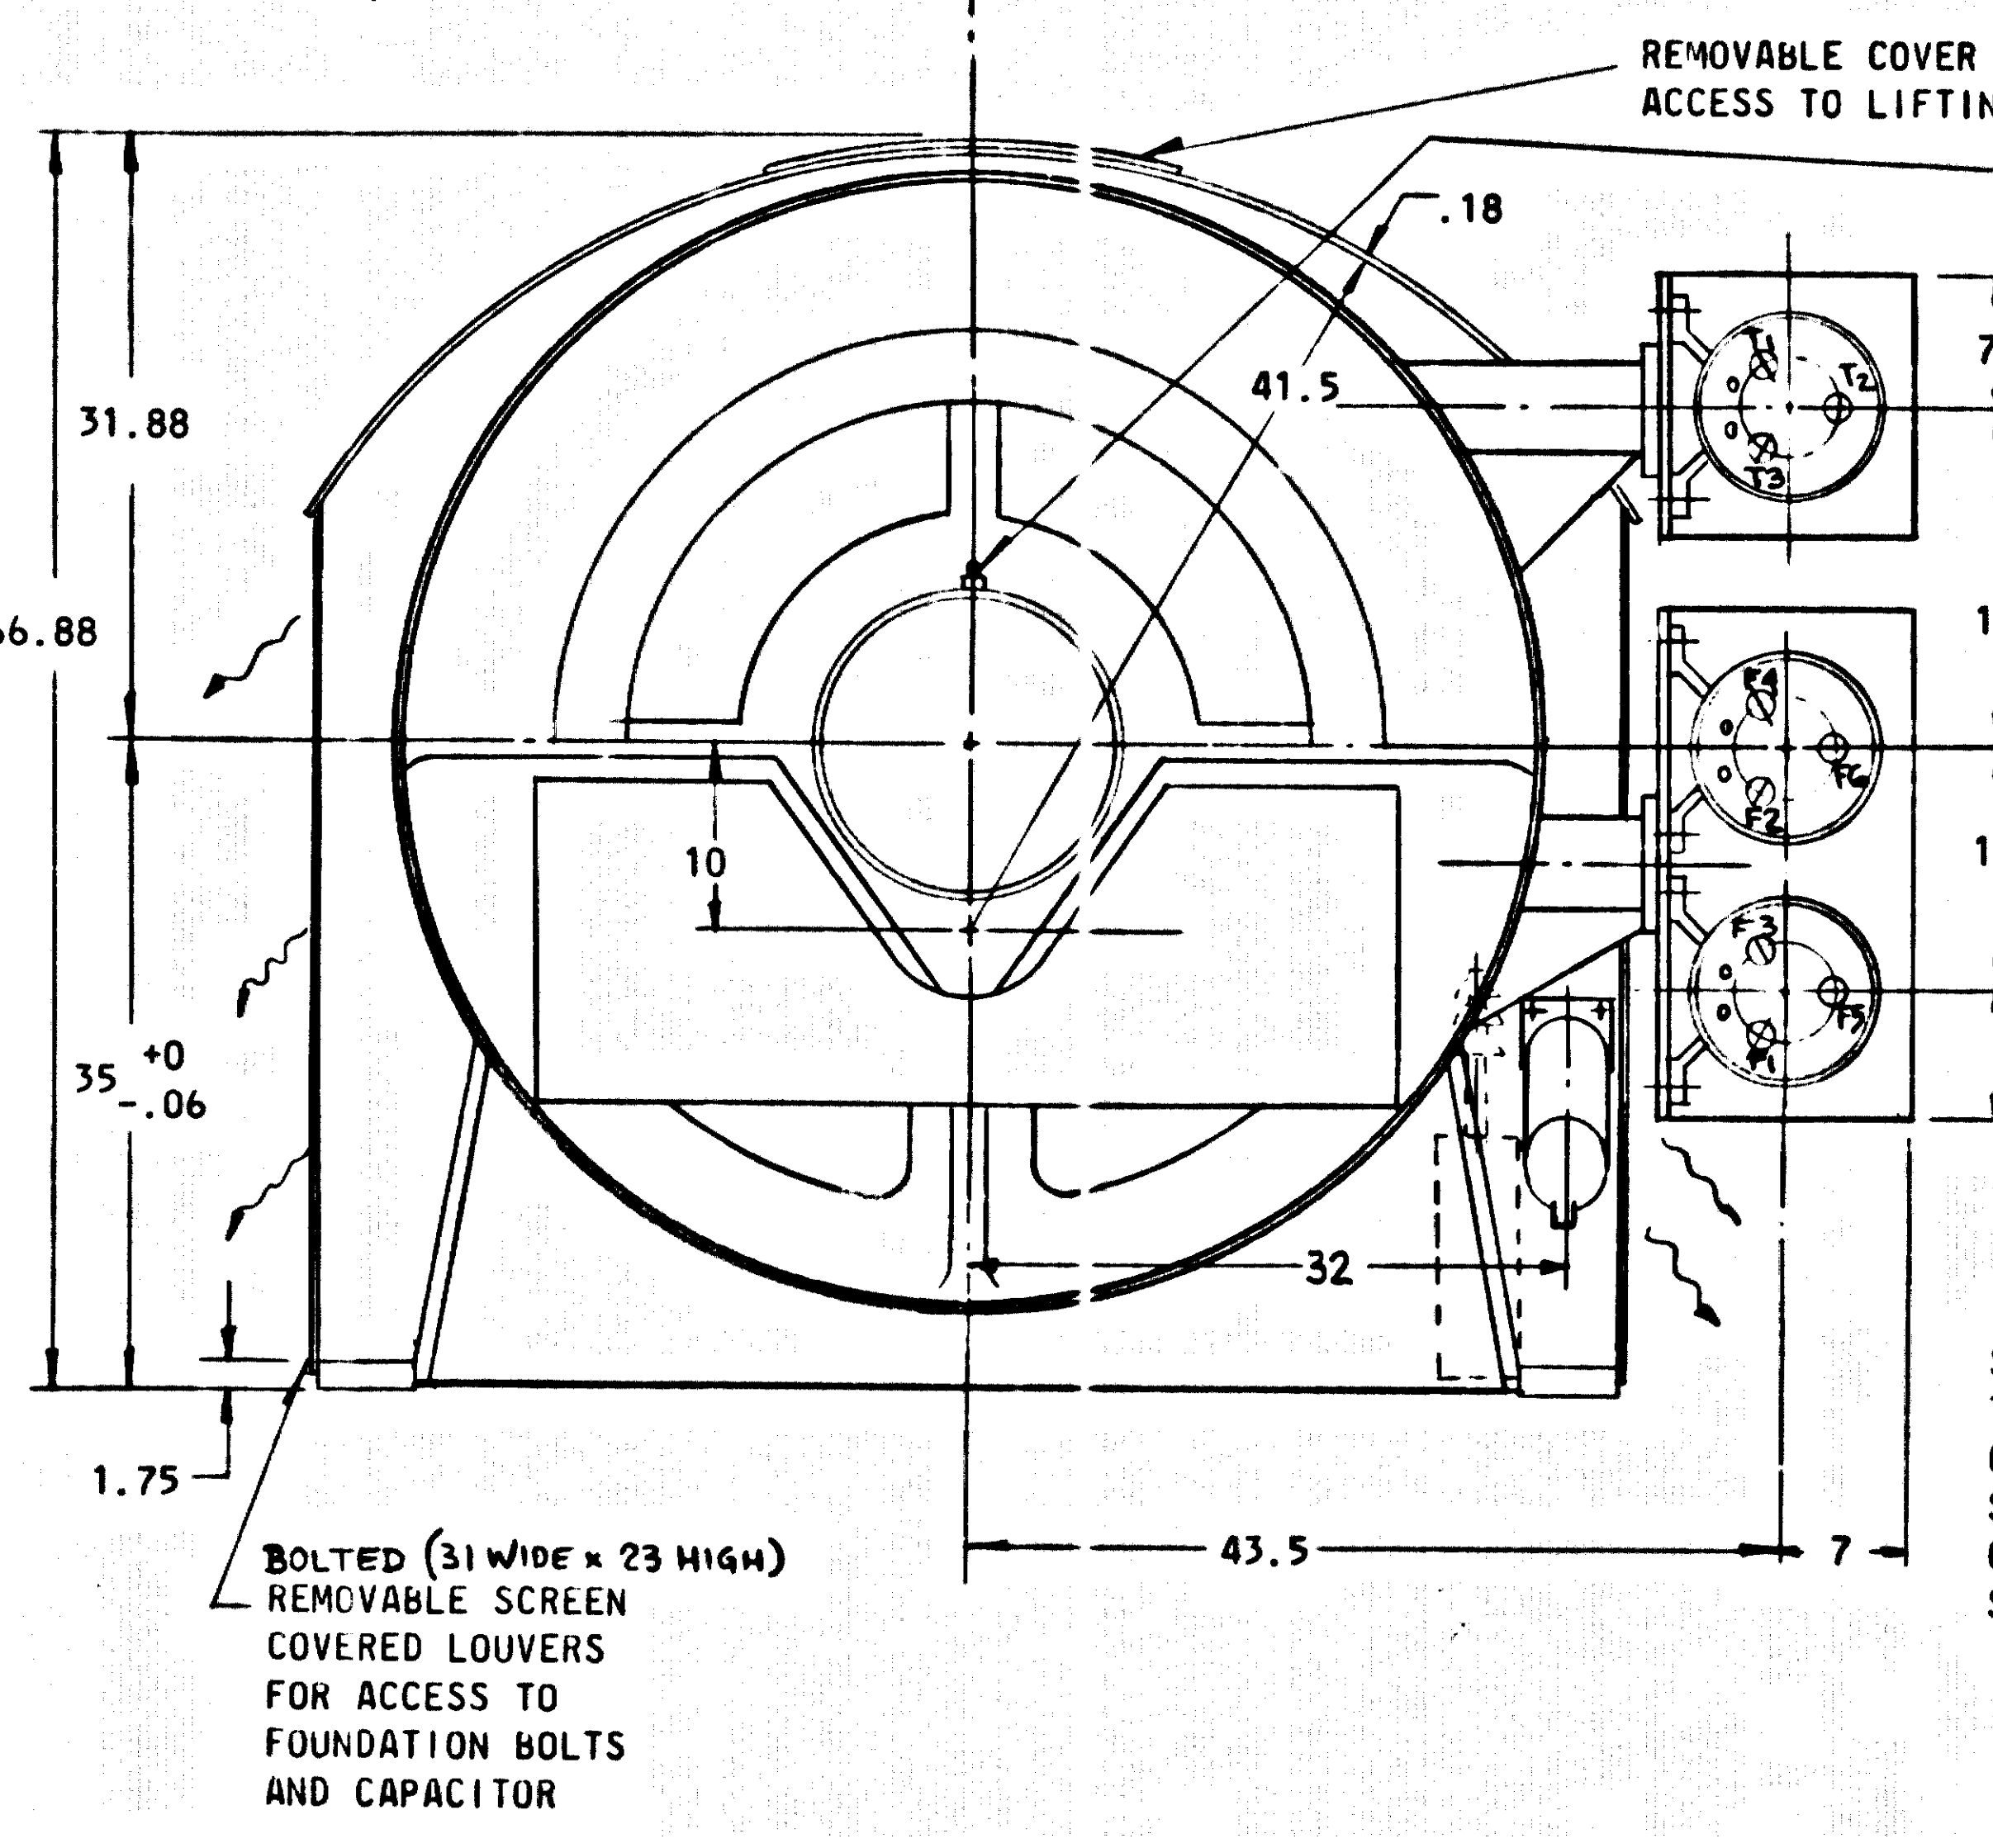

ALEMITE GREASE FITTING IN BOTH BEARING BRACKETS


MAIN LEADS TERMINATE AT PLM COUPLER CAT. # SMG-375A ONE COUPLER FOR MAIN LEADS

SECONDARY LEADS TERMINATE AT PLM COUPLERS - CAT. # SMG-375A TWO COUPLERS FOR SECONDARY LEADS

RUSSELL & STOLL RECEPTACLE CATALOG #SCB 3313 FOR SPACE HEATER CONNECTION 220 VOLT 2750 WATT SINGLE PHASE OPERATION

ONE - 4160 VOLT 3 PHASE SURGE CAPACITOR

OUTDOOR SEALS ON BEARING

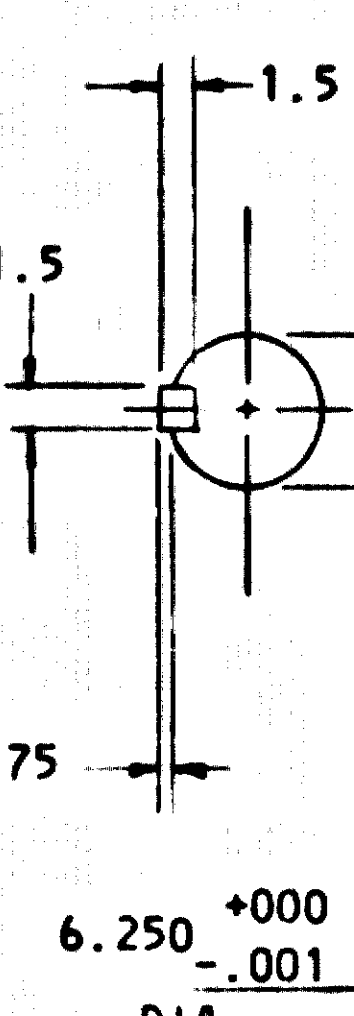

1.25 PIPE TAP FOR STATOR RESISTANCE TEMPERATURE DETECTOR LEADS. LEADS TERMINATE AT TERMINAL BOARD INSIDE CONDUIT BOX SEE DIAGRAM ABOVE

NO	REV	DATE	BY	CHKD	DESCRIPTION
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					

SKF 22228 - FRAME 14-51
22232 - FRT BRG S-1297242 (IMS)
RR BRG S-1297243
H.P. 1500
VOLT 4160
CYCLE 60
PHASE 3
RPM 505

WESTINGHOUSE ELECTRIC CORPORATION

TITLE	CWF DP OUTDOOR MOTOR
OUTLINE	
DIMENSIONS IN INCHES-SCALE	NTS
DFTM	SEKOWSKI
CHKD	4/2
APPD	4/2
ENG	4/2
DIVISION	LRA SNS -27
PLANT LOCATION	E. PGM., PA.
1301	

717C996