
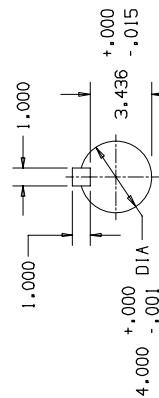
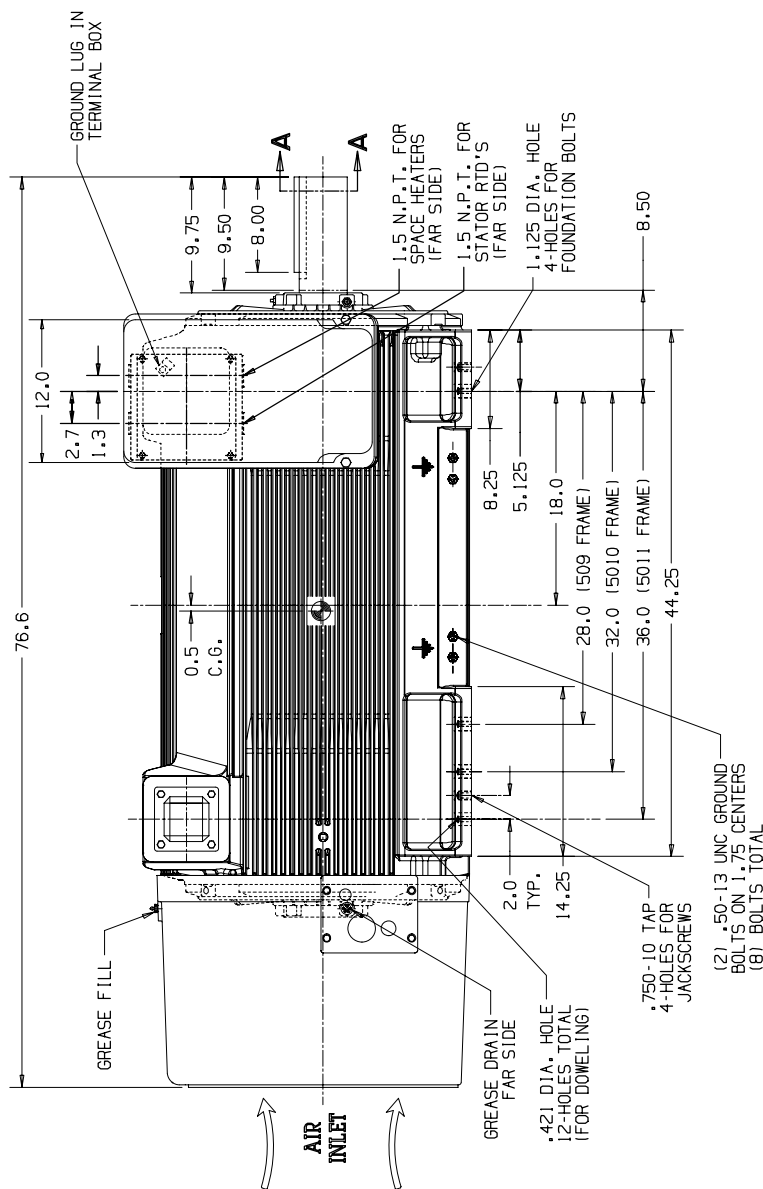


- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN STEPS OF 90°.
 2. APPROXIMATE WEIGHT OF MOTOR: 4,775#
 3. APPROXIMATE WEIGHT OF ROTOR: 1,067#
 4. THIS MOTOR IS SUITABLE FOR ROTATION IN EITHER DIRECTION.
 5. WHEN LIFTING MOTOR, LIFT BY TWO DIAGONALLY OPPOSITE LIFTING POINTS.
 6. FOR RELUBRICATION OF BEARINGS, SEE LUBRICATION PROCEDURES.
 7. NON-DRIVE END BEARING IS INSULATED, INSULATE ANY OTHER BEARING.
 8. THIS MOTOR IS SUITABLE FOR DIRECT CONNECTION ONLY.
 9. SHIMS MAY BE NECESSARY UNDER MOTOR FEET FOR DIRECT CONNECTION.
 10. FOR SAFETY PROCEDURES AND ALIGNMENT REQUIREMENTS, SEE SECTION 10.

BELT DRIVE DATA:

- A) MAXIMUM BELT PULL = 7,580# LOCATED 5.5 INCHES FROM END OF SHAFT.
- B) MINIMUM MOTOR SHEAVE DIAMETER = 16.5 INCHES.
- C) BEARINGS SPECIFIED:
 NON DRIVE END: #6315 (75BC03J3)
 DRIVE END: #NU222E (110RU22M30)

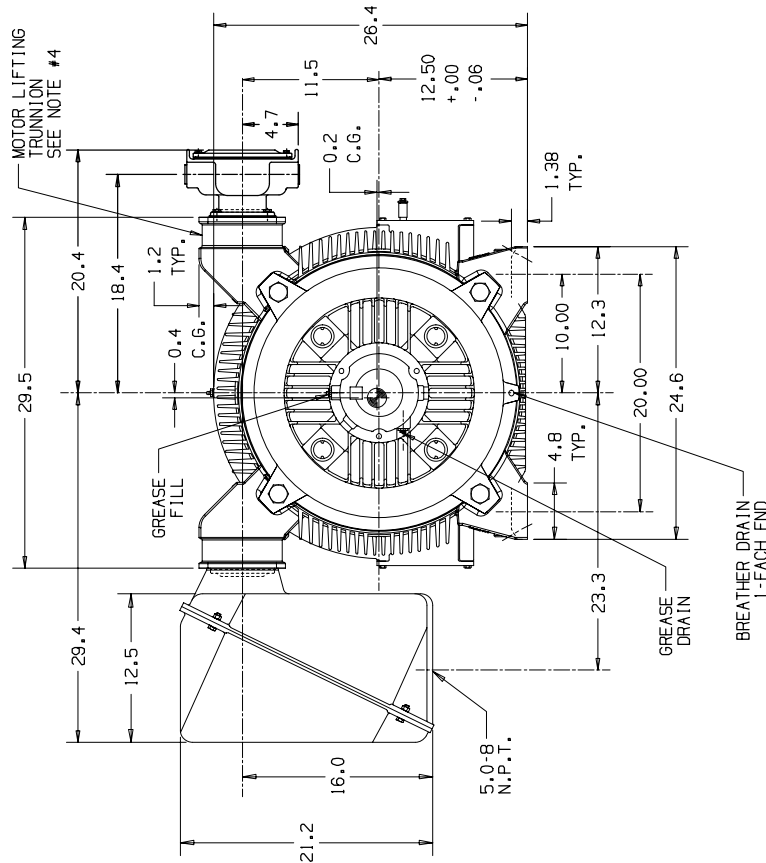

SECTION A-A

SIEMENS					
CERTIFIED PRINT					
CUSTOMER INITIALED PRICE AND DELIVERY PRODUCTION WERE POSTED ON THE BASIS OF THIS DRAWING.					
CUSTOMER					
P.O.#	EAST COAST ELECTRICAL				
	17028				
S.O.#	3007229957-10				
HP	RPM	FRAME	TYPE	VOLTS	PH HZ
400	1200	5011	CMZ	2300/4000	3 60

[illegible]

